


LEDOS
LIGHTING SOLUTIONS

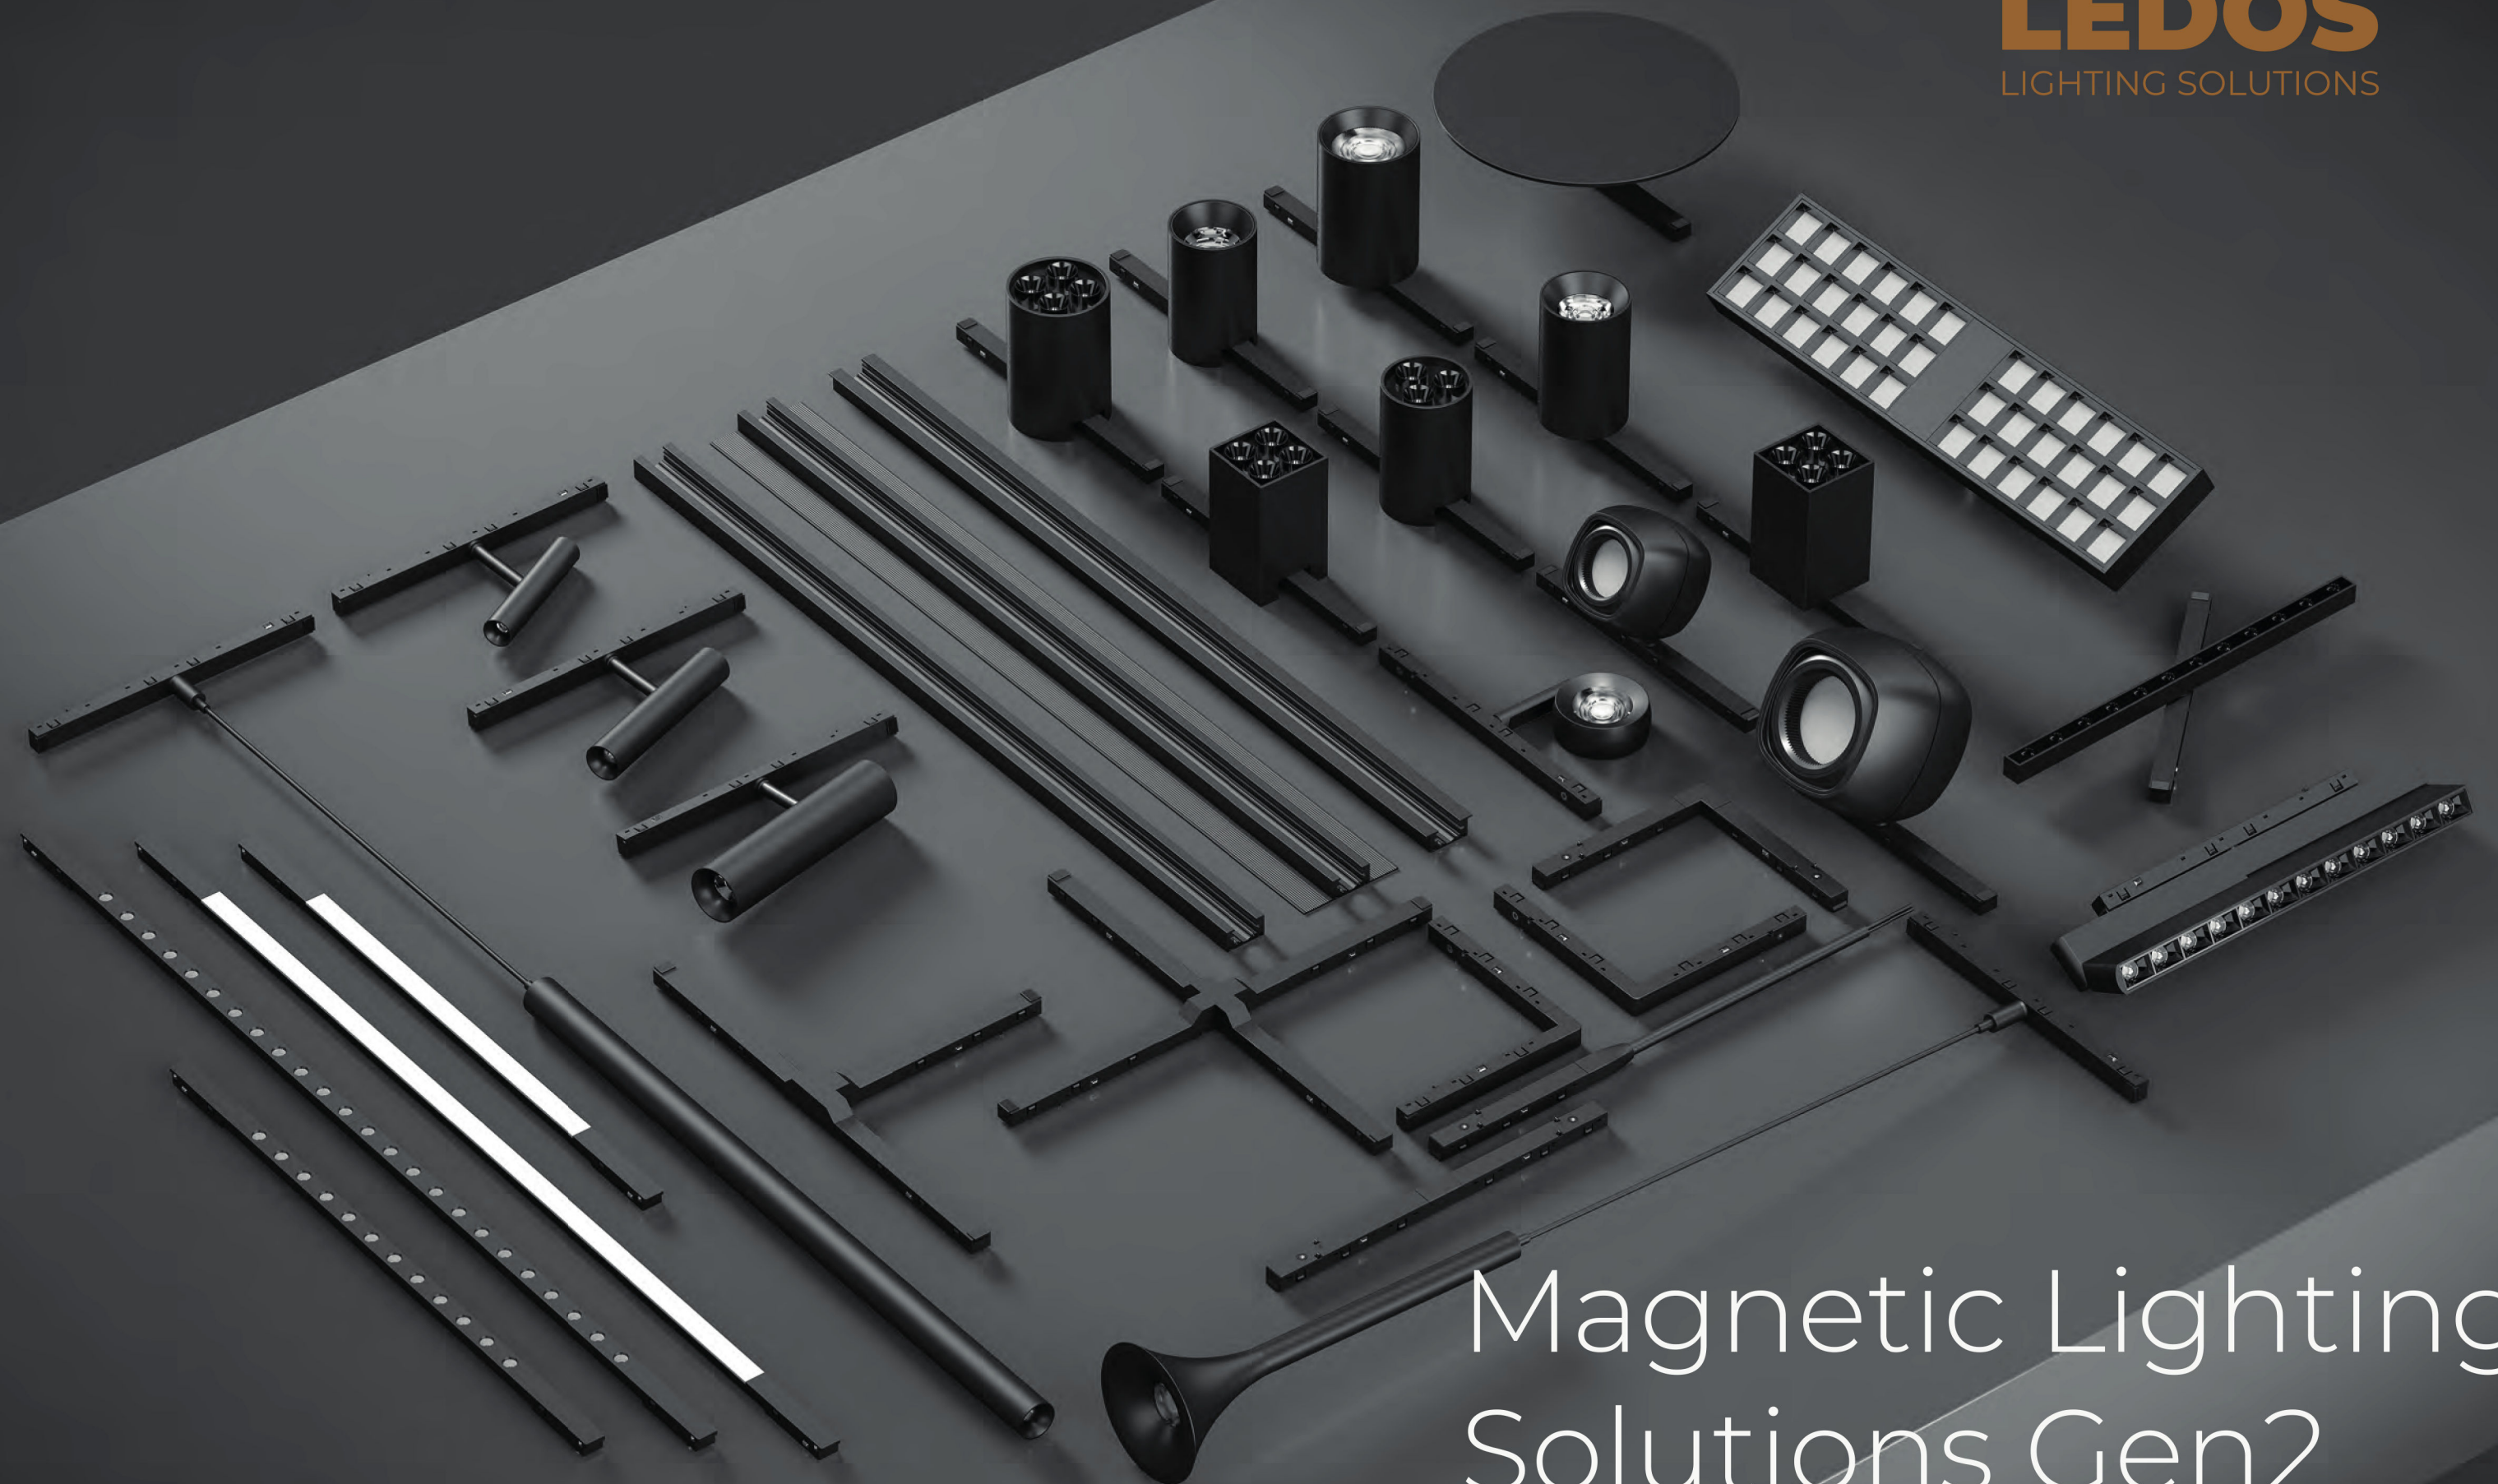

Magnetic Lighting
Solutions Gen2

Magnetic Lighting Solutions Gen2

Linear Diffused F

Linear Diffused F Module

LEDOS
LIGHTING SOLUTIONS


Magnetic Lighting Solutions Gen2

Linear Diffused F




Linear Diffused F - 350	
CRI	Ra90
Size	348 x 11 x 8.9mm
LUMEN	60lm/W
Material	Aluminum + Polycarbonate
Power	6W
CCT	2700K 3000K 4000K 6000K

CB TÜV



Linear Diffused F - 575	
CRI	Ra90
Size	576 x 11 x 8.9mm
LUMEN	70lm/W
Material	Aluminum + Polycarbonate
Power	12W
CCT	2700K 3000K 4000K 6000K

CB TÜV




FIXTURE COLOR ☒ BK ☐ WH


OPTIONS

1 NON-DIM

Linear Diffused F - 300



Linear Diffused F - 600



Magnetic Lighting Solutions Gen2

LinearBlade F

LinearBlade F Module

LEDOS
LIGHTING SOLUTIONS

Magnetic Lighting Solutions Gen2
LinearBlade F



LinearBlade F - 350	
CRI	Ra90
Size	348 x 11 x 8.9mm
LUMEN	70lm/W
Material	Aluminum + Polycarbonate
Power	6W
CCT	2700K 3000K 4000K 6000K
Beam	40°

CB TÜV





LinearBlade F - 575	
CRI	Ra90
Size	576 x 11 x 8.9mm
LUMEN	80lm/W
Material	Aluminum + Polycarbonate
Power	12W
CCT	2700K 3000K 4000K 6000K
Beam	40°

CB TÜV



FIXTURE COLOR ☒ BK ☐ WH

OPTIONS	
1	NON-DIM

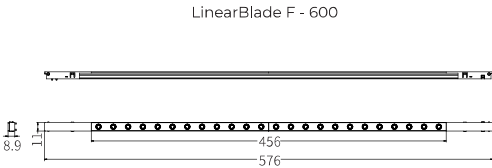

Magnetic Lighting Solutions Gen2

LinearBlade Stick R



LinearBlade Stick R Module

LEDOS
LIGHTING SOLUTIONS

Magnetic Lighting Solutions Gen2

LinearBlade Stick R



LinearBlade Stick R - 250	
CRI	Ra90
Size	235.5 x 11 x 25.6mm
LUMEN	70lm/W
Material	Aluminum
Power	10W
CCT	2700K 3000K 4000K 6000K
Beam	36°

CB TÜV

IP20

Ingress Protection

DC 48V

Voltage

360°

Fixed

FIXTURE COLOR ☒ BK ☐ WH

OPTIONS

- 1


NON-DIM
- 2

0/1-10V
- 3

DALI
- 4

ZIGBEE

CASAMBI



Magnetic Lighting Solutions Gen2

LinearBlade Stick RA



LinearBlade Stick RA Module

LEDOS
LIGHTING SOLUTIONS

Magnetic Lighting Solutions Gen2

LinearBlade Stick RA



LinearBlade Stick RA - 250	
CRI	Ra90
Size	230.7 x 15.7 x 66.9mm
LUMEN	70lm/W
Material	Aluminum
Power	12W
CCT	2700K 3000K 4000K 6000K
Beam	24°

CB TÜV

IP20

Ingress Protection

DC 48V

Voltage

90°

Beam Angle

360°

Adjustable

Adjustable


Beam Angle

FIXTURE COLOR ☒ BK ☐ WH

OPTIONS

- 1 NON-DIM
- 2 0/1-10V
- 3 DALI
- 4 ZIGBEE

CASAMBI

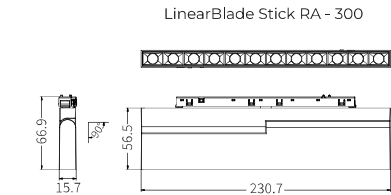

Magnetic Lighting Solutions Gen2

Track Cylinder



Track Cylinder Module

LEDOS
LIGHTING SOLUTIONS

Magnetic Lighting Solutions Gen2
Track Cylinder



Track Cylinder - D16	
CRI	Ra90
Size	Ø16 x 80mm
LUMEN	70lm/W
Material	Aluminum
Power	3W
CCT	2700K 3000K 4000K 6000K
Beam	24° 36° 60°

CB TÜV



Track Cylinder - D20	
CRI	Ra90
Size	Ø20 x 100mm
LUMEN	75lm/W
Material	Aluminum
Power	5W
CCT	2700K 3000K 4000K 6000K
Beam	15° 24° 36°

CB TÜV



Track Cylinder - D30	
CRI	Ra90
Size	Ø30 x 120mm
LUMEN	85lm/W
Material	Aluminum
Power	9W
CCT	2700K 3000K 4000K 6000K
Beam	15° 24° 36°

CB TÜV




FIXTURE COLOR ■ BK □ WH


OPTIONS	
1	NON-DIM
2	0/1-10V
3	DALI
4	ZIGBEE

CASAMBI


Track Cylinder - D16



Track Cylinder - D20



Track Cylinder - D30



Magnetic Lighting Solutions Gen2

Track Coin



Track Coin Module

LEDOS
LIGHTING SOLUTIONS

Magnetic Lighting Solutions Gen2
Track Coin



Track Coin - D50	
CRI	Ra90
Size	Ø50 x 19 x 67mm
LUMEN	110lm/W
Material	Aluminum
Power	5W
CCT	2700K 3000K 4000K 6000K
Beam	15° 24° 36°

CB TÜV

IP20
Ingress
Protection

DC
48V
Voltage

180°

355°


Adjustable

FIXTURE COLOR ☒ BK ☐ WH

OPTIONS

- 1 NON-DIM
- 2 0/1-10V
- 3 DALI
- 4 ZIGBEE

CASAMBI



Magnetic Lighting Solutions Gen2

Track CoinSQ



Track CoinSQ Module

LEDOS
LIGHTING SOLUTIONS

Magnetic Lighting Solutions Gen2
Track CoinSQ



Track CoinSQ - D62	
CRI	Ra90
Size	Ø62 x 62 x 57mm
LUMEN	85lm/W
Material	Aluminum
Power	8W
CCT	2700K 3000K 4000K 6000K
Beam	15° 24° 36°

CB TÜV



Track Coin - D88	
CRI	Ra90
Size	Ø88 x 88 x 80.7mm
LUMEN	85lm/W
Material	Aluminum
Power	15W
CCT	2700K 3000K 4000K 6000K
Beam	15° 24° 36°

CB TÜV




FIXTURE COLOR ☒ BK ☐ WH

OPTIONS


1	NON-DIM
2	0/1-10V
3	DALI
4	ZIGBEE

CASAMBI

Track CoinSQ - D62



Track CoinSQ - D88



Magnetic Lighting Solutions Gen2

Cylinder Downlight R Cell



Cylinder Downlight R Cell Module

LEDOS
LIGHTING SOLUTIONS

Magnetic Lighting Solutions Gen2

Cylinder Downlight R Cell



Cylinder Downlight R Cell - D47	
CRI	Ra90
Size	Ø47.4 x 75mm
LUMEN	70lm/W
Material	Aluminum
Power	6W
CCT	2700K 3000K 4000K 6000K
Beam	26° 38°

CB TÜV



Cylinder Downlight R Cell Integrated - D47	
CRI	Ra90
Size	Ø47.4 x 75mm
LUMEN	70lm/W
Material	Aluminum
Power	6W
CCT	2700K 3000K 4000K 6000K
Beam	26° 38°

CB TÜV




FIXTURE COLOR ■ BK □ WH

OPTIONS


1	NON-DIM
2	0/1-10V
3	DALI
4	ZIGBEE

CASAMBI

Cylinder Downlight Cell - D47



Cylinder Downlight Cell Integrated - D47



Magnetic Lighting Solutions Gen2

Cylinder Downlight R Cell



Cylinder Downlight R Cell Module

Magnetic Lighting Solutions Gen2

Cylinder Downlight R Cell



Cylinder Downlight R Cell - D54	
CRI	Ra90
Size	Ø54,4 x 80mm
LUMEN	70lm/W
Material	Aluminum
Power	10W
CCT	2700K 3000K 4000K 6000K
Beam	26° 38°

CB TÜV



Cylinder Downlight R Cell Integrated - D54	
CRI	Ra90
Size	Ø54,4 x 80mm
LUMEN	70lm/W
Material	Aluminum
Power	10W
CCT	2700K 3000K 4000K 6000K
Beam	26° 38°

CB TÜV




FIXTURE COLOR ☒ BK ☐ WH

OPTIONS

- 1
- NON-DIM
- 2
- 0/1 - 10V
- 3
- DALI
- 4
- ZIGBEE

CASAMBI

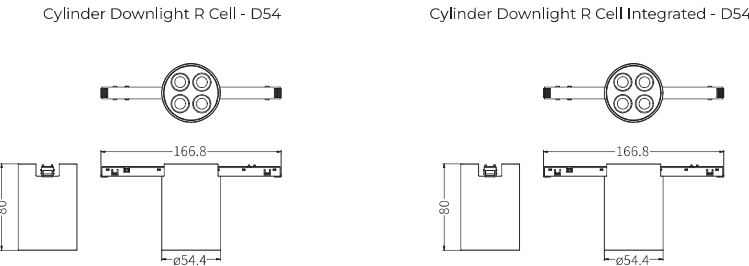

Magnetic Lighting Solutions Gen2

Cylinder Downlight SQ Cell



Cylinder Downlight SQ Cell Module

LEDOS
LIGHTING SOLUTIONS

Magnetic Lighting Solutions Gen2
Cylinder Downlight SQ Cell



Cylinder Downlight SQ Cell - D44	
CRI	Ra90
Size	Ø43.9 x 43.9 x 75mm
LUMEN	75lm/W
Material	Aluminum
Power	10W
CCT	2700K 3000K 4000K 6000K
Beam	26° 38°

CB TÜV



Cylinder Downlight SQ Cell Integrated - D44	
CRI	Ra90
Size	Ø43.9 x 43.9 x 75mm
LUMEN	75lm/W
Material	Aluminum
Power	10W
CCT	2700K 3000K 4000K 6000K
Beam	26° 38°

CB TÜV




FIXTURE COLOR ☒ BK ☐ WH

OPTIONS


1	NON-DIM
2	0/1-10V
3	DALI
4	ZIGBEE

CASAMBI

Cylinder Downlight SQ Cell - D44



Cylinder Downlight SQ Cell Integrated - D44



Magnetic Lighting Solutions Gen2

Cylinder Downlight R Lens



Cylinder Downlight R Lens Module

LEDOS
LIGHTING SOLUTIONS

Magnetic Lighting Solutions Gen2
Cylinder Downlight R Lens



Cylinder Downlight R Lens - D47	
CRI	Ra90
Size	Ø47.4 x 47.4 x 75mm
LUMEN	105lm/W
Material	Aluminum
Power	6W
CCT	2700K 3000K 4000K 6000K
Beam	18° 24° 36° 60°

CB TÜV



Cylinder Downlight R Lens Integrated - D47	
CRI	Ra90
Size	Ø47.4 x 75mm
LUMEN	105lm/W
Material	Aluminum
Power	6W
CCT	2700K 3000K 4000K 6000K
Beam	18° 24° 36° 60°

CB TÜV




FIXTURE COLOR ☒ BK ☐ WH

OPTIONS


1	NON-DIM
2	0/1 - 10V
3	DALI
4	ZIGBEE

CASAMBI

Cylinder Downlight R Lens - D44



Cylinder Downlight R Lens Integrated - D44



Magnetic Lighting Solutions Gen2

Cylinder Downlight R Lens



Cylinder Downlight R Lens Module

LEDOS
LIGHTING SOLUTIONS

Magnetic Lighting Solutions Gen2
Cylinder Downlight R Lens



Cylinder Downlight R Lens - D54	
CRI	Ra90
Size	Ø54.4 x 80mm
LUMEN	105lm/W
Material	Aluminum
Power	10W
CCT	2700K 3000K 4000K 6000K
Beam	18° 24° 36° 60°

CB TÜV



Cylinder Downlight R Lens Integrated - D54	
CRI	Ra90
Size	Ø54.4 x 80mm
LUMEN	105lm/W
Material	Aluminum
Power	10W
CCT	2700K 3000K 4000K 6000K
Beam	18° 24° 36° 60°



CB TÜV



FIXTURE COLOR ☒ BK ☐ WH

OPTIONS	
1	NON-DIM
2	0/1-10V
3	DALI
4	ZIGBEE

CASAMBI



Magnetic Lighting Solutions Gen2

Stick Pendant



Stick Pendant Module

LEDOS
LIGHTING SOLUTIONS

Magnetic Lighting Solutions Gen2
Stick Pendant



Stick Pendant - D20	
CRI	Ra90
Size	Ø20 x 400mm
LUMEN	55lm/W
Material	Aluminum
Power	5W
CCT	2700K 3000K 4000K 6000K
Beam	15° 24° 36°

CB TÜV




FIXTURE COLOR ☒ BK ☐ WH

OPTIONS	
1	NON-DIM
2	0/1-10V
3	DALI
4	ZIGBEE

CASAMBI

Stick Pendant - D20



Magnetic Lighting Solutions Gen2

Sticone Pendant



Sticone Pendant Module

LEDOS
LIGHTING SOLUTIONS

Magnetic Lighting Solutions Gen2
Sticone Pendant



Sticone Pendant - D70	
CRI	Ra90
Size	Ø70 x 225mm
LUMEN	100lm/W
Material	Aluminum
Power	10W
CCT	2700K 3000K 4000K 6000K
Beam	15° 24° 36°

CB TÜV




FIXTURE COLOR ☒ BK ☐ WH

OPTIONS

1	NON-DIM
2	0/1-10V
3	DALI
4	ZIGBEE

CASAMBI

Sticone Pendant - D20

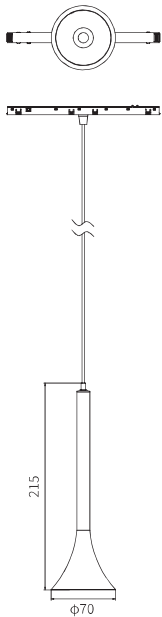

Magnetic Lighting Solutions Gen2

LinearBlade Mesh



LinearBlade Mesh Module

LEDOS
LIGHTING SOLUTIONS

Magnetic Lighting Solutions Gen2
LinearBlade Mesh



LinearBlade Mesh - 300	
CRI	Ra90
Size	Ø314.2 x 74.9 x 18.5mm
LUMEN	95lm/W
Material	Aluminum
Power	18W
CCT	2700K 3000K 4000K 6000K
Beam	60° 75°

CB TÜV

IP20
Ingress
Protection

DC
48V
Voltage

15°

360°


Adjustable

FIXTURE COLOR ☒ BK ☐ WH

OPTIONS

- 1 NON-DIM
- 2 0/1-10V
- 3 DALI
- 4 ZIGBEE

CASAMBI



Magnetic Lighting Solutions Gen2

BladeEdge R



BladeEdge R Module

LEDOS
LIGHTING SOLUTIONS

Magnetic Lighting Solutions Gen2
BladeEdge R



BladeEdge R - 165	
CRI	Ra90
Size	Ø165 x 39.5mm
LUMEN	75lm/W
Material	Aluminum
Power	10W
CCT	2700K 3000K 4000K 6000K

CB TÜV

IP20

Ingress Protection

DC 48V

Voltage

Fixed

FIXTURE COLOR ☒ BK ☐ WH

- OPTIONS
- 1


NON-DIM
- 2

0/1-10V
- 3

DALI
- 4

ZIGBEE

CASAMBI

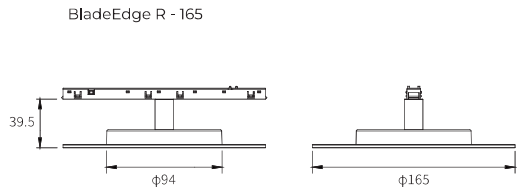


Magnetic Lighting Solutions Gen2



Magnetic Lighting Solutions Gen2
Accessories

LEDOS
LIGHTING SOLUTIONS

Magnetic Lighting Solutions Gen2




Magnetic Track Recessed Trimless	
Size	49.4 x 12.1mm
Material	Aluminum




Magnetic Track Surface / Suspended	
Size	19.5 x 12.1mm
Material	Aluminum




Magnetic Track Recessed Collar	
Size	25.5 x 14.3mm
Material	Aluminum



Butterfly Clips Recessed	
Size	40.5 x 30 x 37.7mm
Material	Aluminum



Magnetic Track Driver 100W	
Size	235.5 x 18 x 31.1mm
Material	Aluminum



Magnetic Track Driver 150W	
Size	305.5 x 18 x 31.1mm
Material	Aluminum


FIXTURE COLOR ■ BK □ WH


Magnetic Lighting Solutions Gen2



Magnetic Track Surface / Suspended Horizontal 90° Bend


Size	40 x 40mm
Material	Aluminum





Magnetic Track Recessed Trimless Horizontal 90° Bend


Size	40 x 40mm
Material	Aluminum





Magnetic Track Recessed Horizontal 90° Bend

Size	40 x 40mm
Material	Aluminum





Magnetic Track Endcap A


Size	80.4 x 28.4 x 34.4mm
Material	Polycarbonate





Magnetic Track Surface / Suspended Vertical 90° Bend


Size	40 x 40mm
Material	Aluminum





Magnetic Track Recessed Trimless Vertical 90° Bend


Size	40 x 40mm
Material	Aluminum





Magnetic Track Recessed Vertical 90° Bend


Size	40 x 40mm
Material	Aluminum





Magnetic Track Endcap B

Size	60 x 18 x 30.6mm
Material	Polycarbonate




FIXTURE COLOR ■ BK □ WH

Magnetic Lighting Solutions Gen2



Magnetic Connection Feeder


Size	102.5 x 11 x 10mm
Material	Polycarbonate





Magnetic Track Connection Vertical Outer 90° Bend

Size	110 x 110 x 11mm
Material	Polycarbonate





Magnetic Track Connection Straight


Size	201 x 11.1 x 9.7mm
Material	Polycarbonate





Magnetic Track "X" Connection

Size	257.9 x 257.9 x 14.9mm
Material	Polycarbonate




FIXTURE COLOR ■ BK □ WH



Magnetic Track Connection Vertical Inner 90° Bend


Size	110 x 110 x 11mm
Material	Polycarbonate





Magnetic Track Connection Horizontal 90° Bend

Size	110 x 110 x 11mm
Material	Polycarbonate





Magnetic Track "T" Connection

Size	257.9 x 11 x 8.8mm
Material	Polycarbonate

